




iDiPOS

TP-80

80mm Thermal Printer

Features

- Compatible with EPSON ESC/POS and STAR command sets
- Support paper end and black mark detection
- Connect and printer faster, stop Receipt misprinting
- Support connecting to WAN printing
- Virtual serial port mode, USB port support OPOS application
- Various print widths
- Built in Web page to set up printer directly
- Printer status monitoring
- High speed driver printing mode, 66% improvement in print speed via serial port
- Windows X86 / X64 / Linux / OPOS driver
- Support up to 68 international languages and GB1830
- Connect to PC through Serial + USB + Ethernet interfaces
- Support IP change via Serial or USB port
- Front paper loading and paper exit

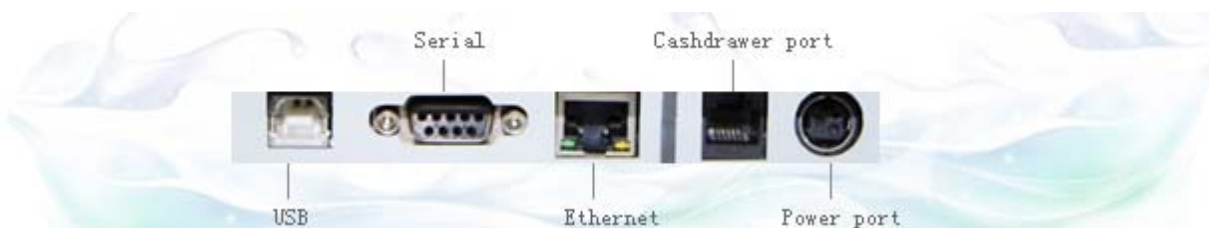

Specification

Printing	Print method	Direct thermal line
	Print width	64/72mm
	Dot density	512/576dot/line
	Print speed	300mm/s
	Interface	Connect to Computer With: Serial + USB + Ethernet
	Paper diameter	83mm
	Line space	3.75mm(can be adjustive)
	Character Size	ANK Font Font A: 12×24dots Font B: 9×17dots Simplified/Traditional Chinese Character: 24×24dots
Barcode	Code page	PC437/Katakana/PC850/PC860/PC863/PC865/West Europe/Greek/ East Europe/Iran/WPC1252/PC866/PC852/PC858/IranII/ Latvian/Arabic/PT151,1251/PC737/WPC1257/Thai Vietnam/PC864/ PC1001/(Latvian)/(PC1001)/(PT151,1251)/(WPC1257)/(PC864)/ (Vietnam)/(Thai)
	Barcode mode	UPC-A/UPC-E/JAN13(EAN13)/JAN8(EAN8) CODE39/ITF/CODABAR/CODE93/CODE128
	Fonts	GB18030
	Data	128K bytes
Buffer	NV Flash	256K bytes
Power	Cashdrawer out	DC 24V/1A
	Power supply	AC 110V/220V, 50~60Hz DC 24V/2A
Physical properties	Weight	1.25kg
	Dimension	140×175×137mm
Environment	Work environment	Temperature: 0~45°C, Humidity: 10~80%
	Storage environment	Temperature: -10~60°C, Humidity: 10~90%
Auto Cutter	Reliability	150km